

## Ordering Information

Catalog No.	Finishes	Mountings	Lamps
26230W WH	Matte White	ProSpec™ Track System	PAR30 75W Max. (Short Neck)
26230W BK	Matte Black		

## Features

- Track attachment fitting:** Die-cast aluminum with separate mechanical and electrical functions. Fitting cannot be engaged or disengaged while fixture is powered. Polarity is not a concern with ProSpec track because of its symmetrical positioning of circuits within the track, adapters are reversed to access one or the other circuit.
- Stem:** 5/8" O.D. .049" wall, stainless steel.
- Horizontal Locking feature:** Machined knob mechanisms permit the locking of horizontal aiming position. Adjustment range is: horizontal 0-350°. Indicator guide with 45° intervals allows precise fixture aiming.
- Vertical Locking feature:** Machined knob mechanisms permit the locking of vertical aiming position. Adjustment range is: vertical 0° (nadir) - 90°. Indicator guide with 15° intervals allows precise fixture aiming.
- Lampholder:** Porcelain, medium base, nickel plated screw shell, #18 ga. braided SF-1 leads.
- Housing:** 20 ga. (.036) steel.
- Lamp and accessory support:** .032 steel, flared for easy entry of reflector assembly, matte black finish.
- Kick reflector assembly:** Holds one accessory behind the spread lens; example: color filter, UV filter, Heat filter. Assembly is removable from front using a twist and lock motion.
- Reflector:** Embossed texture anodized aluminum; reflects light towards upper portion of wall and ceiling line.
- Lever:** Energizes fixture by 90° rotation.
- Clamping tabs:** Expands or releases gripper springs from track ledge; gripper springs hold attachment fitting securely within track.

## Finish

All painted finishes are powder coated baked enamel.

## Options & Accessories

Accessories: 3 3/4" dia. series. Filters, lenses, screens and louvers. Holds one accessory behind the spread lens. Order accessories separately

## Electrical

Electrical components: Polycarbonate moldings.  
Contacts: Heavy gauge 1/2 hard brass developed for Lightolier's "U" shaped track conductors.

## Labels

UL; I.B.E.W. U.S. & Foreign Patents Pending

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


Lightolier a Genlyte Thomas Company  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®



## Lighting Data

### FOOTCANDLES ON WALL:

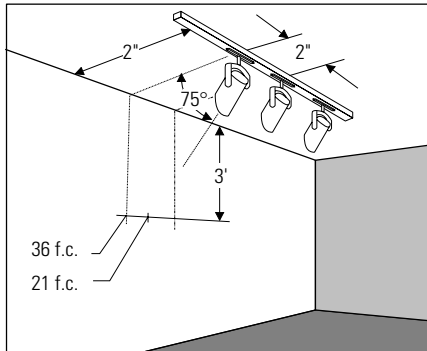

EXAMPLE: With track located 2' from wall and multiple units spaced 2' on center and aimed 75° from horizontal, the illumination on wall 3' from ceiling will be 36 f.c. beneath units and 21 f.c. between units.

### Multiple Units 75W PAR 30 FL

		Track 2' from Wall-- 2' and 3' On Center								
Distance From Ceiling in Feet	1'	14	8	15	1'	12	4	12		
	2'	28	13	28	2'	18	7	18		
	3'	36	21	36	3'	31	12	31		
	4'	31	21	31	4'	25	12	25		
	5'	28	14	28	5'	16	9	16		
	6'	13	9	13	6' <td>11</td> <td>7</td> <td>11</td>	11	7	11		
	7'	9	7	9	7' <td>7</td> <td>5</td> <td>7</td>	7	5	7		
	8'	7	5	7	8' <td>5</td> <td>3</td> <td>5</td>	5	3	5		
	9'	5	4	5	9' <td>4</td> <td>3</td> <td>4</td>	4	3	4		

		Track 3' from Wall-- 3' and 4' On Center						
Distance From Ceiling in Feet	1'	8	4	8	1'	7	2	7
	2'	19	18	19	2'	18	6	18
	3'	36	17	37	3'	34	11	34
	4'	38	15	38	4'	27	18	27
	5'	18	18	18	5'	16	7	16
	6'	11	7	11	6'	18	5	18
	7'	7	5	7	7'	6	3	6
	8'	4	3	4	8'	4	2	4
	9'	3	2	3	9'	2	2	2

Footcandles are average and rounded off and are based on a minimum of five units.  
For 50W PAR 30 FL, multiply footcandles by 0.55.

### Job Information

### Type:

Lightolier a Genlyte Thomas Company [www.lightolier.com](http://www.lightolier.com)  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

# LIGHTOLIER®